

AQUA COOLER®



RP SERIES

**POINT-OF-USE
WATER
COOLERS
MAINS CONNECTED**

MODELS

RP2 - COOK & COLD

RP2G - COOK & COLD, GRANITE

RP3 - HOT & COLD

RP3G - HOT & COLD, GRANITE

FEATURES

Available in White and Granite

No drain required

Unique Float Valve Assembly

Contemporary design to suit any workplace

World class reliability and performance

Cup dispenser bracket and cover included

Stainless steel reservoirs

PROUDLY AUSTRALIAN MADE

AQUA FRESH
WATER PURIFYING SYSTEMS

AQUAFRESH
WATER PURIFYING SYSTEMS
40 Blackwood St, Mitchelton
Ph: 3355 1591

AQUA COOLER

COLD WATER RESERVOIR

All dispensers have stainless steel tanks that hold approximately 1.8 litres of chilled water during normal usage. Each has a chilling capacity of 5 l.p.h. during peak periods.

HOT WATER RESERVOIR

The stainless steel hot water tank is fitted with a high performance 575-watt band heater. This model delivers 50 cups (150ml) of hot water per hour at approximately +90°C. Hot tanks have drains fitted for easy cleaning and sanitisation. It is very easy to remove for service if required. Each tank has its components swaged together. As no fusion welding is used, the occurrence of pitting, crevice or galvanic corrosion is prevented.

REFRIGERATION

The system uses 50gms of R134A Refrigerant, which is non-toxic, non-flammable and is environmentally friendly. A capillary tube, which has no moving parts, controls refrigerant flow.

TEMPERATURE CONTROL

A factory pre-set thermostat controls the temperature of water in the cold tank. The water temperature in the hot tank is controlled by a mechanical thermostat set to approximately 85°C.

COMPRESSOR

1/16 h.p. capacity 49 watts. The compressor is hermetically sealed for silent running.

CONDENSER

All steel tube and wire construction.

ELECTRICAL

240 volts, 50Hz. A 2 metre house cable and 3 pin plug are supplied.

PERFORMANCE

To ARI 1010-94 Standard

WEIGHT-PACKED

RP2 - 15kg
RP3 - 16kg

DIMENSIONS

Width - 370mm	Container Capacity
Depth - 320mm	20ft - 216 units
Height - 970mm	40ft - 430 units


WARRANTY

Twelve months comprehensive coverage.
Five years for compressor replacement



RP SERIES

POINT-OF-USE
WATER
COOLERS
MAINS CONNECTED

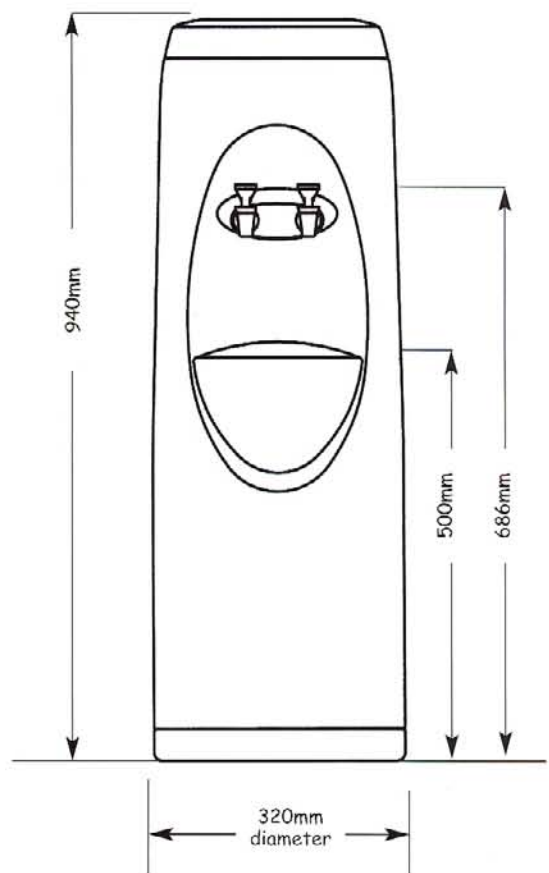

DISTRIBUTED BY

AQUAFRESH
WATER PURIFYING SYSTEMS
40 Blackwood St, Mitchelton
Ph: 3355 1591

F.V.A.

RELIABLE FLOAT VALVE ASSEMBLY

Designed to operate at water pressure ranging from 100 to 700 kPa this unique float valve assembly offers reliability and simplicity of service when needed. It needs only one connection to a 1/2" Nylon tube and a "John Guest" fitting. Made from food grade plastic and stainless steel hardware this assembly will not taint the water at all. An air filter is included in the assembly to protect the water from contamination.