



An Alpine under sink water purifier is a convenient means of providing clean, fresh tasting water free of contaminan fraction of the cost of bottled water.

Hidden away plumbed conveniently under the sink, the range of Alpine water filters is ideal for home and/or office s

All systems are supplied with installation kits which include connections to your under sink pipework, pressure limiting back flow prevention valving, shut off valve, high pressure food grade tubing and a stylish chrome faucet.

The benefits of underbench purifiers

It reduces:



Sediment, dirt, rust and silt to improve water clarity



Offensive odours from built up organic matter in water pipes. Offensive tastes from bacteria killing chlorine



VOC - Volatile Organic Compounds

Prevents against:



Cryptosporidium, Giardia Cyst and selected volatile organic compound down to 0.5 micron (nominal)



Bacteria





Alpine TJ Series Single Underbench Filter

Single Under bench Type Model **Part Number** Alpine SUTJ Series SUTJ3-K2A-DM Micron Rating Flow 0.5 micron (nominal) Rate 4 litres/minute (optimal) Max. 38 degrees C Temperature

862 kPa (125 psi)

275 mm high x 95 mm wide x 93 mm









Alpine TJ Series Twin Underbench Filter

Pressure

Dimensions

Type Twin Undersink Model Alpine TJ Series Part Number DUTJ43-K2A-DM Micron Rating 0.5 micron (nominal)

Flow Rate 4 litres / minute (optimal) Maximum

Temperature 38 deg C 862 kPa (125 psi) Pressure 275mm high x 190mm wide x

Dimensions 93mm deep













Alpine 3 Stage Undersink Water Filter

Type 3 Stage Undersink Model Alpine TJ Series Part Number TUTL43NF-K6-DM Micron Rating 0.2 micron

Flow Rate 4 litres per minute (optimal)

Temperature 38 degrees C max. Pressure 862 kPa (125 psi)

Dimensions 275 mm high x 290 mm wide x 93

mm deep











Alpine Reverse Osmosis Undersink Water Purifier

Type Reverse Osmosis

Model Undersink Alpine TJ Series

Part Number TJRO13T12-K3A-DM

Micron Rating 5 angstrom

Flow Rate 1.5 litres per minute (optimal) from Accumulator

tank

Temperature 38 degrees C max. Pressure 862 kPa (125 psi)

Dimensions 290 mm high x 390 mm wide x 93 mm deep





HIGH FLOWING FILTERED WATER FOR YOUR KITCHEN MIXER TAP



Introducing the Alpine AQ905 Full Flow System

A high performance, high flowing filtered water for your kitchen mixer tap. Fits in line with your cold water mains supply to your kitchen mixer faucet. Filtered water cartridge Watermarked certified to reduce chlorine, bad tastes and odours, sediment and other chemicals.

What's in the kit

Bracketed filter head-1/2"BSP male inlet and outlet

High Flow Filter Cartridge Watermark Certified AS3497 Lic. 23066

Two 450mm x ½"BSP braided hoses – 15 year warranty – Watermark certified WMKA21431

Ceramic disc chrome stop valve with swivel nut – Watermark certified

Chrome brass pressure limiting anti hammer back flow prevention valve -

Watermark certified to AS1357.2, AS2845.1, Lic 23059

Features

Quick and easy installation – fits in line with existing braided hoses

Ideal for stone benchtops or where a separate dedicated faucet is not ideal

System hidden away under the kitchen bench

Quick and easy cartridge replacement with up to 12 months usage

Specifications

Flow rate: 8 litres per minute

Max water temperature: 38 deg C Filtration Grade: Fine

Micron Rating: 5

Minimum Pressure: 172 kPa (25psi)
Maximum Pressure: 860 kPa (125 psi)

Warranty (excl cartridge): 3 years

Dimensions: 450mm (L) x 110mm (W)



The Alpine"Grande"TriFlowPolished Chrome Designer Mixer Faucet

A chrome plated finish brass this mixer tap/faucet and has an ultra modern look in any kitchen.

The Alpine "Grande" faucet features a pin levered Hot and Cold mixer operation on the top with an easy to use pin lever control under the spout for pure water flow. This faucet eliminates the need for separate filtered water faucet.


It is the perfect faucet for **Reverse Osmosis**, **Single**, **Twin or Triple Undersink Water Filtration Systems**. The Alpine "Grande" faucet can easily replace an

existing mixer faucet to reduce the clutter on your kitchen bench.

This product is Watermark

Certified to AS/NZS 3718 Cert. 23033

\$560 INC GIST

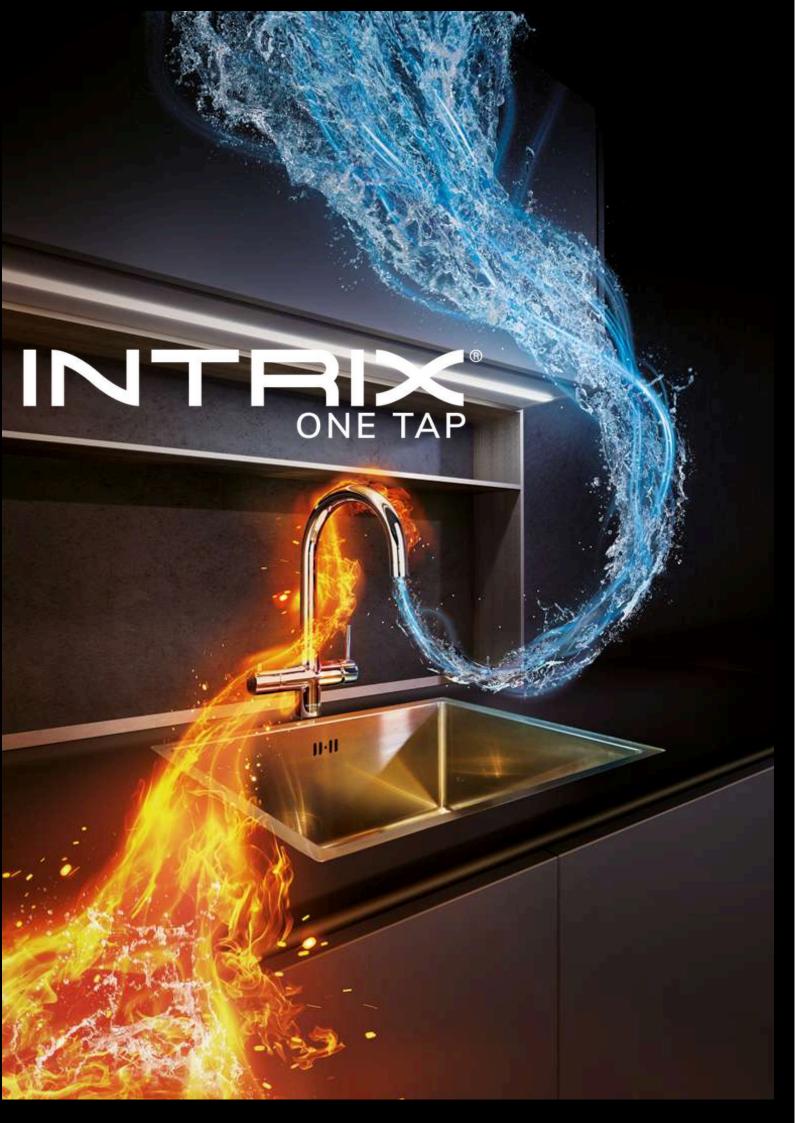

INT RIX® ONE TAP



Aqua Fresh is an Experienced Intrix Distributer and installer

Visit our showroom to see this amazing system in action Suitable for Home or Office

Enjoy many great features and benefits by installing the Intrix One Tap System under the sink

> Instant hot water Filtered ambient water

Standalone or all in one Faucets available in a range of colours









The Most Certified Water **Purification System**































fect warranty plus one (1) year extended irranty via online registration except for ne filter lifespan highly depends on the

ehensive warranty (parts and labou d) at no additional cost.



At Intrix One Tap, we prioritise your sa That's why we offer a 100% satisfaction

Our commitment to quality and customer support nd pure, safe drinking water for your home or





Chlorine is universally used to disinfect water but it is generally regarded as not safe for drinking, showering or bathing. Today, millions of people worldwide filter their drinking water but comparatively few filter their shower water even though research studies have reported and warned of the potential damaging effects of exposure to chlorine evaporated out of shower water.

Public concern is growing and one day something will be done but in the short term, the simple, economical answer is to install a shower filter that will reduce or remove the harmful chlorine as well as dirt, rust, sediment and other water borne contaminants.



Universal shower hose filter

(hose and showerhead not included)

The shower hose filter connects between the water inlet and the shower hose and has a unique ball swivel connection.

The filter provides a service life of about 6 months and uses the special high performance KDF and Chlorgon TM filtration media.

The replaceable cartridge can be easily reversed to provide balanced filtration and back flushing for excellent long life.

The unit is available in Chrome finish only.

Size: 40mm diameter x 200mm length

System Benefits:

Reduces chlorine, dirt and odours from your shower water. Reduces problems such as dry skin and hair, eye and skin irritations, scum on shower screens caused by chlorine in your shower water.

This high performance shower filter provides a clean and healthy shower for the entire family.

Cartridge life approximately 4 to 6 months.



Shower Filter SFHOWH

(shower rose not included)

The high output replaceable cartridge is easily reversed to provide balanced filtration and back flushing and gives an excellent service life of about 12 months. Features special high performance KDF and Chlorgon TM filtration media.

The shower filter unit is available in White, Chrome and Gold finish as options to suit almost every bathroom décor. Available with or without massaging action shower rose.

Size: 89mm diameter x 108mm length

System Benefits:

Reduces chlorine, dirt and odours from your shower water.

Reduces problems such as dry skin and hair, eye and skin irritations, scum on shower screens caused by chlorine in your shower water

This high performance shower filter provides a clean and healthy shower for the entire family.

Cartridge life approximately 12 months.

ALPINE CARTRIDGES

Aqua Fresh supplies Alpine labelled cartridge filtration that is used extensively to remove sediment, tastes and odours, colour, chemicals, particulates for drinking, process and medical quality water.

The Alpine range of premium cartridges covers a wide variety of applications and properties -the common types of which are listed on the following pages.

With over 28 years of service in the water filtration industry the technical team at Aqua Fresh can help you source the most efficient cartridge for your filtration requirements.



Alpine Polyspun Sediment Cartridges

ManufacturedfromSpun Polypropylene media

Spun melt manufacture – no centre core lining to restrict flow

- · Spun and melted to provide graded depth
- · Suitable for town mains water supply
- Compatible with most liquids
- · High sediment reduction capability
- Low pressure drop
- · Zero chemical residue
- Lower flow restriction



Highly efficient in removing from water the following:

- Dirt
- Rust
- Silt
- Scale particles
- Sand
- Algae
- Organic materials

Slimline 2.5" diameter polyspun cartridges

Part Number	Length	Micron	Flow L/Min	
SPF001	10"	1	20	
SPF005	10"	5	25	
SPF020	10"	20	30	
SPF050	10"	50	40	
SPF001-20	20"	1	80	
SPF005-20	20"	5	80	
SPF020-20	20"	20	80	

Jumbo 4.5" diameter polyspun cartridges

Part Number	Length I	Micron	Flow L <i>Min</i>	
SPF001BW	10"	1	70	
SPF005BW	10"	5	80	
SPF020BW	10"	20	80	
SPF001BW-20	20"	1	150	
SPF005BW-20	20"	5	160	
SPF020BW-20	20"	20	160	

Alpine String Wound Sediment Cartridges

Manufactured from a durable Polypropylene cord wound in a precise pattern around a rigid polypropylene core

- Suitable for town mains or rainwater water supply & a wide range of industrial liquids
- · High sediment reduction capability
- Low pressure drop
- Zero chemical residue
- Low flow restriction
- Temperatures up to 165 F (73.90 C)



Highly efficient in removing from water the following:

Dirt

Sand

Rust

Algae

Silt

- Organic materials
- Scale particles

Slimline 2.5" diameter string wound cartridges

Part Number	Length	Micron	Flow L/Min
SED-P1-10	10"	1	30
SED-P5-10	10"	5	30
SED-P10-10	10"	10	30
SED-P25-10	10"	25	30
SED-P50-10	10"	50	30
SED-P1-20	20"	1	60
SED-P5-20	20"	5	60
SED-P25-20	20"	25	60
SED-P50-20	20"	20	60

Jumbo 4.5" diameter string wound cartridges

Part Number L	ength	Micron	Flow L/Min
SED-P1-10BW	10"	1	80
SED-P5-10BW	10"	5	80
SED-P25-10BW	10"	25	80
SED-P50-10BW	10"	50	80
SED-P1-2OBW	20"	1	160
SED-P5-20BW	20"	5	160
SED-P25-20BW	20"	25	160
SED-P50-20BW	20"	20	160

Alpine Pleated Sediment Cartridges

Polypropylene core, polypropylene/polyester media Cartridges do not contain cellulose fibre – therefore resistant to rot and mildew

Highly efficient in removing from water the following:

- Dirt
- Rust
- Silt
- Scale particles
- Sand
- Algae



- Washable
- Suitable for rainwater supply
- Large surface area
- High sediment reduction capability
- Minimum pressure drop
- Suitable for low pressure applications
- Lower flow restriction

Slimline 2.5" diameter pleated cartridges

VPM5-10 10" 5 40
VPM10-10 10" 10 40
VPM20-10 10" 20 40
VPM50-10 10" 50 40
VPM100-10 10" 100 40
VPM5-20 20" 5 80
VPM20-20 20" 20 80
VPM50-20 20" 50 80

Jumbo 4.5" diameter pleated cartridges

Part Number	Length	Micron	Flow L/Min
PP5BW	10"	5	90
PP10BW	10"	10	90
PP20BW	10"	20	90
PP50BW	10"	50	90
PP5BW-20	20"	5	180
PP20BW-20	20"	20	180
PP50BW-20	20"	50	180

Alpine Carbon Cartridges

For reduction of chlorine, bad tastes and odours, colour, cysts, some Volatile Organic Compounds, pesticides, herbicides

Carbon Block Cartridges

- Effectively reduce unwanted taste, odour & chlorine from drinking water.
- Specific cartridges reduce cysts (Giardia & Cryptosporidium) and lead.

Granular Activated Carbon Cartridges

- Low pressure drop Effectively reduce
- unwanted taste, odour & chlorine from drinking water.
- Reduction of colour due to tannins



Slimline 2.5" diameter carbon block cartridges

Part Number	Length	Micron	Flow L/Min
C240-05	5"	1	10
CXB-05	5"	0.5	10
C235	10"	5	15
C240	10"	1	15
C240Z*	10"	1	15
CXB10**	10"	0.5	15
C240-20	20"	1	30
CXB-20	20"	0.5	30

*C240Z Bacteriastatic

** CXB10 Bacteriastatic & Cyst

Slimline 2.5" dia. granular activated carbon cartridges


Part Number	Length	Micron	Flow	
GAC510	10"	5	15	
GAC-P5-20	20"	5	27	

Jumbo 4.5" diameter carbon cartridges

Part Number	Length	Micron	Flow L/Min	
C235-10BW	10"	5	60	
CXB-10BW	10"	0.5	60	
C235-20BW	20"	5	110	

Jumbo 4.5" dia. granular activated carbon cartridges

Part Number I	_ength	Micron	Flow L/Min
CGA-5BW	10"	20	30
CGA-5-20BW	20"	20	40

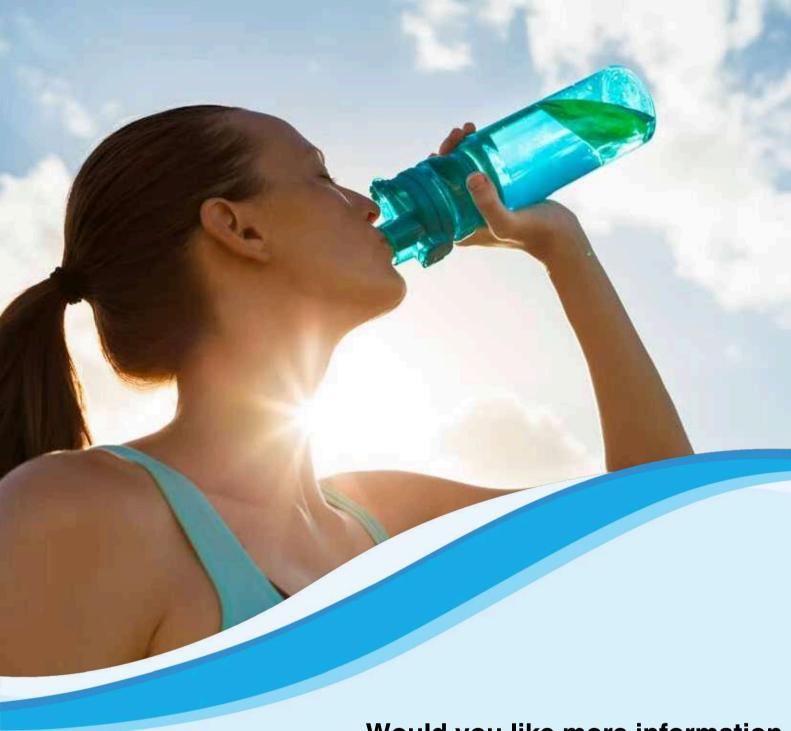

Would you like more information about our products and services?

Call our showroom on 07 3355 1591 or send us your general enquiry online at aquafresh.com.au/contact-us



Aquafresh Holdings Pty Ltd 76 FarringtonSt, Alderley QLD 4051

aquafresh.com.au | 07 3355 1591 enquiry@aquafresh.com.au | ABN 96 119 427 897